

430 Rec'd PCT/PTO 03 SEP 1999

FORM PTO-1390 (REV 11-98)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE(S) (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (if known, see 37 CFR 1.53) 09/380340
INTERNATIONAL APPLICATION NO. PCT/9598/00713	INTERNATIONAL FILING DATE 05/03/1995	PRIORITY DATE CLAIMED 05/03/1997	
TITLE OF INVENTION HINGE MECHANISM FOR A LAMP PROTECTOR			
APPLICANT(S) FOR DO/EO/US			

Applicant herewith submits to the United States Designated Office (DO/US) the following items and other information:

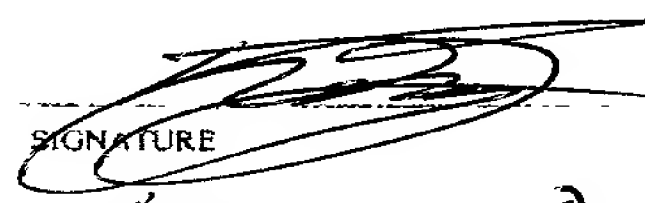
1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
 2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
 3. ☐ This express request to begin national examination under 35 U.S.C. 371(c) at any time rather than delay examination until the expiration of the application under 35 U.S.C. 371(h) and PCT Articles 22 and 39(1).
 4. ☐ A proper Demand for International Preliminary Examination made by the 19th month from the earliest claimed priority date.
 5. ☐ A copy of the International Application as filed (35 U.S.C. 371(c)(2)):
 - a. ☐ is transmitted herewith (required only if not provided by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
 6. ☐ A translation of the International Application (35 U.S.C. 371(c)(2)).
 7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)):
 - a. ☐ are transmitted herewith (required only if not provided by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the period for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
 8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
 9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
 10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).
- Items 11. to 16. below concern document(s) or information included:
11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
 12. ☐ An assignment document for recording (37 CFR 3.28 and 3.31) is included.
 13. ☐ A **FIRST** preliminary amendment.
 A **SECOND** or **SUBSEQUENT** preliminary amendment.
 14. ☐ A substitute specification.
 15. ☐ A change of power of attorney and/or address of the applicant.
 16. ☐ Other items or information:

U.S. APPLICATION NO. 61-10725-3-15

1. The first step in the process is to identify the problem or issue that needs to be addressed. This involves gathering information and understanding the context of the problem.

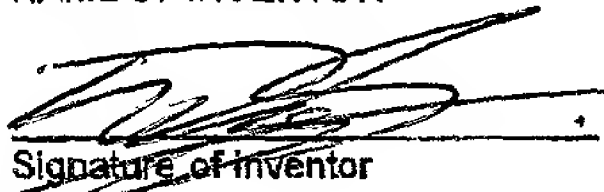
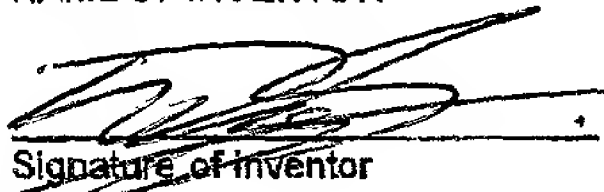
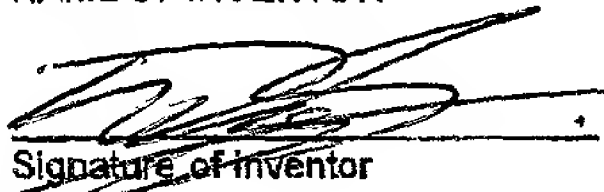
514 Rec'd PCT/PTO 03 SEP 1999

SEP 13 1964

17. <input type="checkbox"/> The following fees are submitted:				CALCULATIONS		PTO USE ONLY
BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)): Neither international preliminary examination fee (37 CFR 1.442) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the USPTO \$970.00 International preliminary examination fee (37 CFR 1.442) paid to USPTO but International Search Report prepared by the USPTO \$840.00 International preliminary examination fee (37 CFR 1.442) paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$760.00 International preliminary examination fee paid to USPTO (37 CFR 1.442), but all claims did not satisfy provisions of PCT Article 34(1) \$670.00 International preliminary examination fee paid to USPTO (37 CFR 1.442) and all claims satisfied provisions of PCT Article 34(1) \$96.00						
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$		
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(c))				\$		
CLAIMS	NUMBER FILED	MULTIPLE DEPENDENT CLAIM(S)	RATE			
Total claims	- 20 =		X \$18.00	\$		
Independent claims	- 3 =		X \$78.00	\$		
			+ \$260.00	\$		
TOTAL OF ABOVE CALCULATIONS =				\$	455	
Reduction of 1/2 for filing by small entity, if applicable / Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).				\$	445	
SUBTOTAL =				\$		
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(d)).				\$		
TOTAL NATIONAL FEE =				\$	930	
Fee for recording the enclosed assignment (37 CFR 1.211(f)); fee assignment must be accompanied by an appropriate cover sheet (37 CFR 1.211(g)) \$2.00 per property.				\$		
TOTAL FEES ENCLOSED =				\$	930	00
				Amount to be: refunded	\$	
				charged	\$	
<p>a. <input type="checkbox"/> A check in the amount of \$ <u>930</u> _____ with the above fees is enclosed.</p> <p>b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.</p> <p>c. <input type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. _____. A duplicate copy of this sheet is enclosed.</p>						
<p>NOTE: Where an appropriate time limit under 37 CFR 1.137(a) or (b) must be filed and granted to restore the application, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application.</p>						
<p>SEND ALL CORRESPONDENCE TO</p> <div style="text-align: right; margin-top: 20px;">  SIGNATURE <u>KELVIN DOYLE</u> NAME </div> <div style="text-align: right; margin-top: 20px;"> REGISTRATION NUMBER </div>						

PTO/SB/09 (12-97)
 Approved for use through 9/30/00 OMB 0851-0031
 Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

STATEMENT CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) & 1.27(b))—INDEPENDENT INVENTOR	Docket Number (Optional)									
Applicant, Patentee, or Identifier: <u>KELVIN DOYLE</u> Application or Patent No.: <u>PCT/GB98/00713</u> Filed or Issued: <u>03/05/98</u> Title: <u>HING MECHANISM</u>										
<p>As a below named inventor, I hereby state that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:</p> <p> <input type="checkbox"/> the specification filed herewith with title as listed above. <input type="checkbox"/> the application identified above <input checked="" type="checkbox"/> the patent identified above. </p> <p>I have not assigned, granted, conveyed, or licensed, and am under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).</p> <p>Each person, concern, or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:</p> <p> <input type="checkbox"/> No such person, concern, or organization exists. <input checked="" type="checkbox"/> Each such person, concern, or organization is listed below. <u>THE DOYLE FAMILY TRUST</u> </p> <p>Separate statements are required from each named person, concern, or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)</p> <p>I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))</p>										
<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; border-bottom: 1px solid black; text-align: center;"> <u>KELVIN DOYLE</u> NAME OF INVENTOR </td> <td style="width: 33%; border-bottom: 1px solid black; text-align: center;"> NAME OF INVENTOR </td> <td style="width: 33%; border-bottom: 1px solid black; text-align: center;"> NAME OF INVENTOR </td> </tr> <tr> <td style="border-bottom: 1px solid black; text-align: center;">  Signature of inventor </td> <td style="border-bottom: 1px solid black; text-align: center;"> Signature of inventor </td> <td style="border-bottom: 1px solid black; text-align: center;"> Signature of inventor </td> </tr> <tr> <td style="border-bottom: 1px solid black; text-align: center;"> <u>22/11/99</u> Date <u>22nd Nov 99</u> </td> <td style="border-bottom: 1px solid black; text-align: center;"> Date </td> <td style="border-bottom: 1px solid black; text-align: center;"> Date </td> </tr> </table>		<u>KELVIN DOYLE</u> NAME OF INVENTOR	NAME OF INVENTOR	NAME OF INVENTOR	 Signature of inventor	Signature of inventor	Signature of inventor	<u>22/11/99</u> Date <u>22nd Nov 99</u>	Date	Date
<u>KELVIN DOYLE</u> NAME OF INVENTOR	NAME OF INVENTOR	NAME OF INVENTOR								
 Signature of inventor	Signature of inventor	Signature of inventor								
<u>22/11/99</u> Date <u>22nd Nov 99</u>	Date	Date								

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Patent Office

402 Rec'd PCT/PTO

3 SEP 1999

09/380340

- 1 -

HINGE MECHANISM FOR A LIMB PROTECTOR

5 This invention relates to a hinge mechanism for a limb protector, particularly for a limb protector for the joint of a human limb, that is a knee or elbow protector. Such items are commonly known as knee or elbow braces.

10 Injuries to limbs and their joints occur for several reasons, including participation in contact sports such as American football or ice hockey, in individual sports such as skiing or motorcycle racing, or indeed in any active sport. In addition injuries to limbs and their joints occur in active occupations such as the armed
15 forces, or in any type of accident.

After an injury occurs, it is often desirable to either slightly restrict the movement of the limb or joint, for example by elastic supports, or severely restrict
20 movement of the limb or joint by rigid splints, or rigid braces that restrict the degree of movement of the limb or joint, for example by hinged knee or elbow braces (de-rotational braces). Such braces which are available to prevent twisting of a knee or elbow can be worn during

- 2 -

activities such as skiing and can have preventative as well as protective effect. Such hinged braces are by their very nature restrictive of movement and permit only forward bending of the knee or elbow. Other braces are available for sports such as American football which protect the knee against side impact or frontal impact but also restrict movement (prophylactic or preventative braces). Dynamic braces are also available with eccentrically placed hinges to provide protection to torn ligaments. The present invention relates to rigid hinged braces.

WO 94/18916 discloses a variety of hinged braces to be worn for the protection or support of a damaged, or potentially damageable joint. The braces disclosed have, when applied to a knee joint, respective upper and lower rigid supports which engage the leg above and below the knee and which are hinged one to the other to allow bending of the joint. Because of the way the joints of a human being are physically constructed the bending of a joint can occur around any point within a given area covering that joint when that joint is viewed from the side, or in a direction substantially parallel to the axis of rotation of the joint. The exact point about which the joint rotates is dependent upon the construction of the joint, any injuries sustained by the joint or the limb either side of the joint, or the amount by which the limb, and hence the joint has already been bent. When for example the joint being rotated is the knee, the points about which rotation may occur may be either side of the cartilage that separates the tibia and fibula bones on the one side, and the femur on the other side of the knee joint or on both sides of that cartilage. Accordingly, to hinge the upper and lower

- 3 -

supports together about a simple pivot is unsatisfactory. Instead, in preferred constructions as shown in Figures 5 and 16 of WO 94/18916, each is pivoted to an intermediate member and the two intermediate members are pivoted to one another. This allows the axis of rotation to vary relative to the joint, e.g. when moving from standing vertically to bending one's knees.

The constructions shown in WO 94/18916 are cumbersome, complex to assemble, and require the manufacture of a plurality of telescopic shells which must slide over one another easily, but which must be sufficiently rigid and impact-resistant (as such braces are often worn during contact sport play to enable play to occur, but reducing the risk of further injury to a recovering limb) to ensure that such movement can be maintained without jamming. These criteria are not easy to meet.

I have now found that a much more effective and robust hinging mechanism can be provided which maintains the flexibility of movement provided by the constructions shown in WO 94/18916, but which does not incur its disadvantages. In particular, it may enable easy assembly and disassembly and is very resistant to mechanical damage.

According to the present invention there is provided a hinge mechanism for a limb protector including first and second supports each adapted to engage a part of a limb in either side of an articulated joint, the hinge mechanism being pivotally connected to both supports, and wherein the hinge mechanism comprises a base plate, an arm pivotally rotatable against the plate about an axis substantially perpendicular thereto and located to one

- 4 -

end of the arm, and means for connecting the support members pivotally to the other end of the arm and to the plate, all of the three axes of rotation of the pivotal connections being substantially parallel, and wherein
5 associated with each of the three pivotal connections are means for restricting the relative degree of rotation of the respective two members to a defined amount.

10 Preferably, the arm is mounted rotationally on a circular boss on the plate and the plate has stop means formed thereon restricting the angular rotation of the arm, e.g. to a maximum of 60°.

15 Preferably, the angular rotation of each support member relative to the end of the arm or the base plate respectively is restricted by the passage of a stud or post along an arcuate slot centred on the pivot axis. The post is conveniently on the base or arm and the arcuate slot in the support member. The extent of the
20 arcuate slot may vary, but is commonly in the range of 50 to 110°.

By hinging of the supports together using a hinge mechanism according to the present invention, with all
25 three pivots having a restricted degree of rotation, the degree of rotation of each of the first, second and third pivotal connections may be set to predetermine the maximum translational and rotational movement between the bones of the joint around which the brace is to be fixed.
30 This may be achieved by providing slots of lengths corresponding to the maximum likely desired degree of pivotal movement, e.g. 60° and 90°, and then limiting the degree of rotation of either or both slots by inserting into the arcuate slot spacers or other means of

- 5 -

preventing rotation, so that the relevant studs or posts may move only along a portion of that slot.

5 The degree of rotation available to the arm may be limited by locating the arm in a recessed portion of the plate which is bounded by radial walls e.g. inclined at 60° to one another. To limit the degree of rotation further spacers or other means of preventing rotation may be fixed within the recess. In place of a recess with
10 walls, the amount of rotation of the arm may be defined by studs mounted on the plate.

The hinge mechanism of the present invention may be made of any suitable material, preferably aluminium alloy,
15 though, if desired, suitable engineering plastics materials may be used. The support members are conventionally made of rigid plastics or fibre reinforced resin type compositions. In order to avoid over-stressing such materials where they are connected to the
20 hinge mechanism, reinforcements, e.g. of metal, may be installed. In particular, it is found useful to reinforce the edges of the arcuate slots with a metal plate or liner.

25 In use, each limb protector or brace would have a hinge mechanism according to the present invention on either side of the joint around which the brace was placed.

30 The hinge of the present invention may be employed on all currently known types of knee brace once suitable modification has been made to those knee braces. In particular, the present invention is of value applied to braces as described in WO94/18916, with the arrangement as described above replacing the front plates of the

- 6 -

hinged brace described therein.

The invention is illustrated by way of example with reference to the accompanying drawings in which:

5

Figure 1 shows a perspective view of a knee brace incorporating a hinge mechanism according to the present invention, and

10

Figure 2 shows a detail of the brace of Figure 1 in exploded view.

15

Referring to Figure 1, the knee brace which is illustrated lying on its side and from the back as shown in the drawing, consists basically of upper and lower hollow shell members 1 and 2 respectively shaped to accommodate the thigh and calf of the wearer. Members 1 and 2 are joined by hinge mechanisms 3 and 4, described in more detail below, and may be held on the respective parts of the leg by means of hard moulded semi-cylindrical portions 5 and 6. Projecting from the ends of portions 5 and 6 are locating tabs and straps which fit into corresponding apertures in members 1 and 2 via appropriate snap action catches enabling each to be pushed towards the member 1 or 2 respectively to fit snugly around the thigh or calf respectively.

25

Substantially the whole of the interior of members 1, 2, 5 and 6 is lined with a cushioning foam for comfort.

30

Fitted to the interior of each of members 1 and 2 are some short metal rods which are substantially vertical when the brace is worn with the wearer standing upright. These are obscured in the drawing by double-sided burr fastener straps 10, 11, 12 and 13. Straps 12 and 13 are relatively short and one end of each terminates in an

- 7 -

elongate plastics ring 15 and 16 respectively through which the free end of the rather longer straps 10 and 11 may be passed and then folded back on itself to tension each strap round the rear of the lower thigh and upper calf respectively. The central portions of the longer straps 10 and 11 may be fabric faced rather than faced with burr fastener material, for greater comfort.

10 Hollow shell member 2 is constructed in two parts, the left hand one of which as shown in the drawing has an annular outward facing groove 20 and the other portion of which to the right in Figure 1 has an annular inward facing rib 21. Rib 21 can slide in the annular groove to a certain extent, thus allowing a limited degree of swivelling between the portion of the brace which is 15 attached to the thigh and the portion which is attached to the calf. This swivel feature is described in more detail in Specification WO 94/18916. The right hand portion of member 2 is held captive in the left hand 20 portion by means of a pair of squat T-section bosses which pass through two short slots 25 and 26 located in the base of groove 20.

In accordance with the invention, members 1 and 2 are 25 held together by the two hinged mechanisms 3 and 4. Each of hinge mechanisms 3 and 4 consists of a base plate 40, 41 respectively which is pivotally attached directly to member 1 and which has mounted on it a swivellable arm to the free end of which is pivotally attached member 2.

30 The detailed construction of hinge mechanism 4 is shown in Figure 2. The construction of hinge mechanism 3 is identical save for being a mirror image of hinge mechanism 4.

- 8 -

Referring now to Figure 2, this shows an exploded view of the hinge mechanism with the two members 1 and 2 detached from the base plate 41 and the arm contained therein, for clarity of explanation.

5

Base plate 41 has two threaded bosses on its surface facing hinge mechanism 3. One of these, denoted 50 in Figure 2, acts as the pivotal connection between base plate 41 and member 1. For this purpose, a lockable threaded stud 51 may be passed through an aperture 52 in member 1 and screwed into boss 50 which is internally threaded. As that occurs, an upstanding arcuate tab 54 enters into an arcuate slot 55 in the material of member 1, slot 55 being centred on aperture 52. Not shown in the drawing is a metal reinforcement which is moulded into the exterior of member 1 and which has an aperture registered with aperture 52 and an arcuate slot registered with arcuate slot 55. When member 1 is accordingly assembled on to base plate 41, it can pivot relative thereto, but only to the extent allowed by the travel of tab 54 in slot 55.

If it is desired to restrict the range of rotation of member 1 relative to base plate 41, a suitable stop member may be inserted at one or both ends of slot 55.

Mounted on base plate 41 is a swivel arm 60. The left hand end of this arm as seen in Figure 2 is of ring shape and fitted round a further threaded post formed integrally with base plate 41 and held in place by a screw-in stud 61. The circular left hand end of arm 60 is located in a generally circular recess 62 in base plate 41, the circular wall of which is formed in two sections, one of radius only slightly greater than the

- 9 -

radius of the ring on the left hand end of arm 60 and the other of enlarged radius, the two part cylindrical walls of recess 62 abutting at a shoulder 64 which lies in a radial plane relative to the hidden threaded stud about which arm 60 may swivel. On one side of the generally ring-shaped end of arm 60 is a partial annular flange 66 which, when its end as shown on the left in Figure 2 abuts shoulder 64, limits the clockwise rotation of arm 60. The anti-clockwise rotation is limited by the right hand end of arm 60 as shown in Figure 2 coming to abut an internal wall 68 formed in base member 41. Thus, arm 60 may swivel through a defined angle, which angle may be reduced by inserting packing members against shoulder 64 or wall 68 if it is desired to do so.

Member 2 is pivotally connected to the right hand end of arm 60 by means of a threaded stud 70 which passes through an aperture 71 in member 2 and into a threaded post 72 on the end of arm 60. Arm 60 is formed with an upstanding tab 74 which, when member 2 is assembled on to the arm 60, passes through an arcuate slot 76 in member 2. As with member 1, where of aperture 71 and arcuate slot 76 is prevented by a metal plate set into the side of member 2, not visible in Figure 2. Again, the extent of rotation permitted between arm 60 and member 2 may be reduced by inserting stop members into one or both ends of arcuate slot 76.

The outer periphery of base plate 41 may be contoured so that its inner face lies closely against the exterior faces of members 1 and 2 thus reducing the ingress of dirt or other contamination when the knee brace is worn. The hinge mechanisms 3 and 4 permit natural flexure of the wearer's leg with the three pivotal connections, the

- 10 -

- 5 pivot axes of which correspond to the threaded shafts of studs 51, 61 and 70, enabling a natural and comfortable movement to occur. Excessive flexure of the joint, beyond what the wearer's medical or physiotherapist advisors would recommend, may be prevented by restricting the range of angular movement of one, two or all three of these pivotal connections by the use of packing members as indicated above.

- 11 -

CLAIMS

1. A hinge mechanism for a limb protector including first and second supports each adapted to engage a part of a limb in either side of an articulated joint, the hinge mechanism being pivotally connected to both supports, and wherein the hinge mechanism comprises a base plate, an arm pivotally rotatable against the plate about an axis substantially perpendicular thereto and located to one end of the arm, and means for connecting the support members pivotally to the other end of the arm and to the plate, all of the three axes of rotation of the pivotal connections being substantially parallel, and wherein associated with each of the three pivotal connections are means for restricting the relative degree of rotation of the respective two members to a defined amount.
2. A hinge mechanism according to Claim 1 wherein the arm is mounted rotationally on a circular boss on the plate and the plate has stop means formed thereon restricting the angular rotation of the arm.
3. A hinge mechanism according to Claim 2 wherein the degree of rotation of the arm is limited by locating the arm in a recessed portion of the plate which is bounded by radial walls lined at an angle to one another.
4. A hinge mechanism according to Claim 1, 2 or 3 wherein the angular rotation of each support member relative to the end of the arm or the base plate respectively is restricted by the passage of a stud or post along an arcuate slot centred on the pivot axis.

- 12 -

5. A hinge mechanism according to Claim 4 wherein the post is on the base or arm and the arcuate slot in the support member.

5 6. A hinge mechanism according to Claim 4 or 5 and including one or more spacers inserted into the arcuate slot(s) to limit the degree of rotation by enabling the stud or post to move only along a portion of the arcuate slot(s).

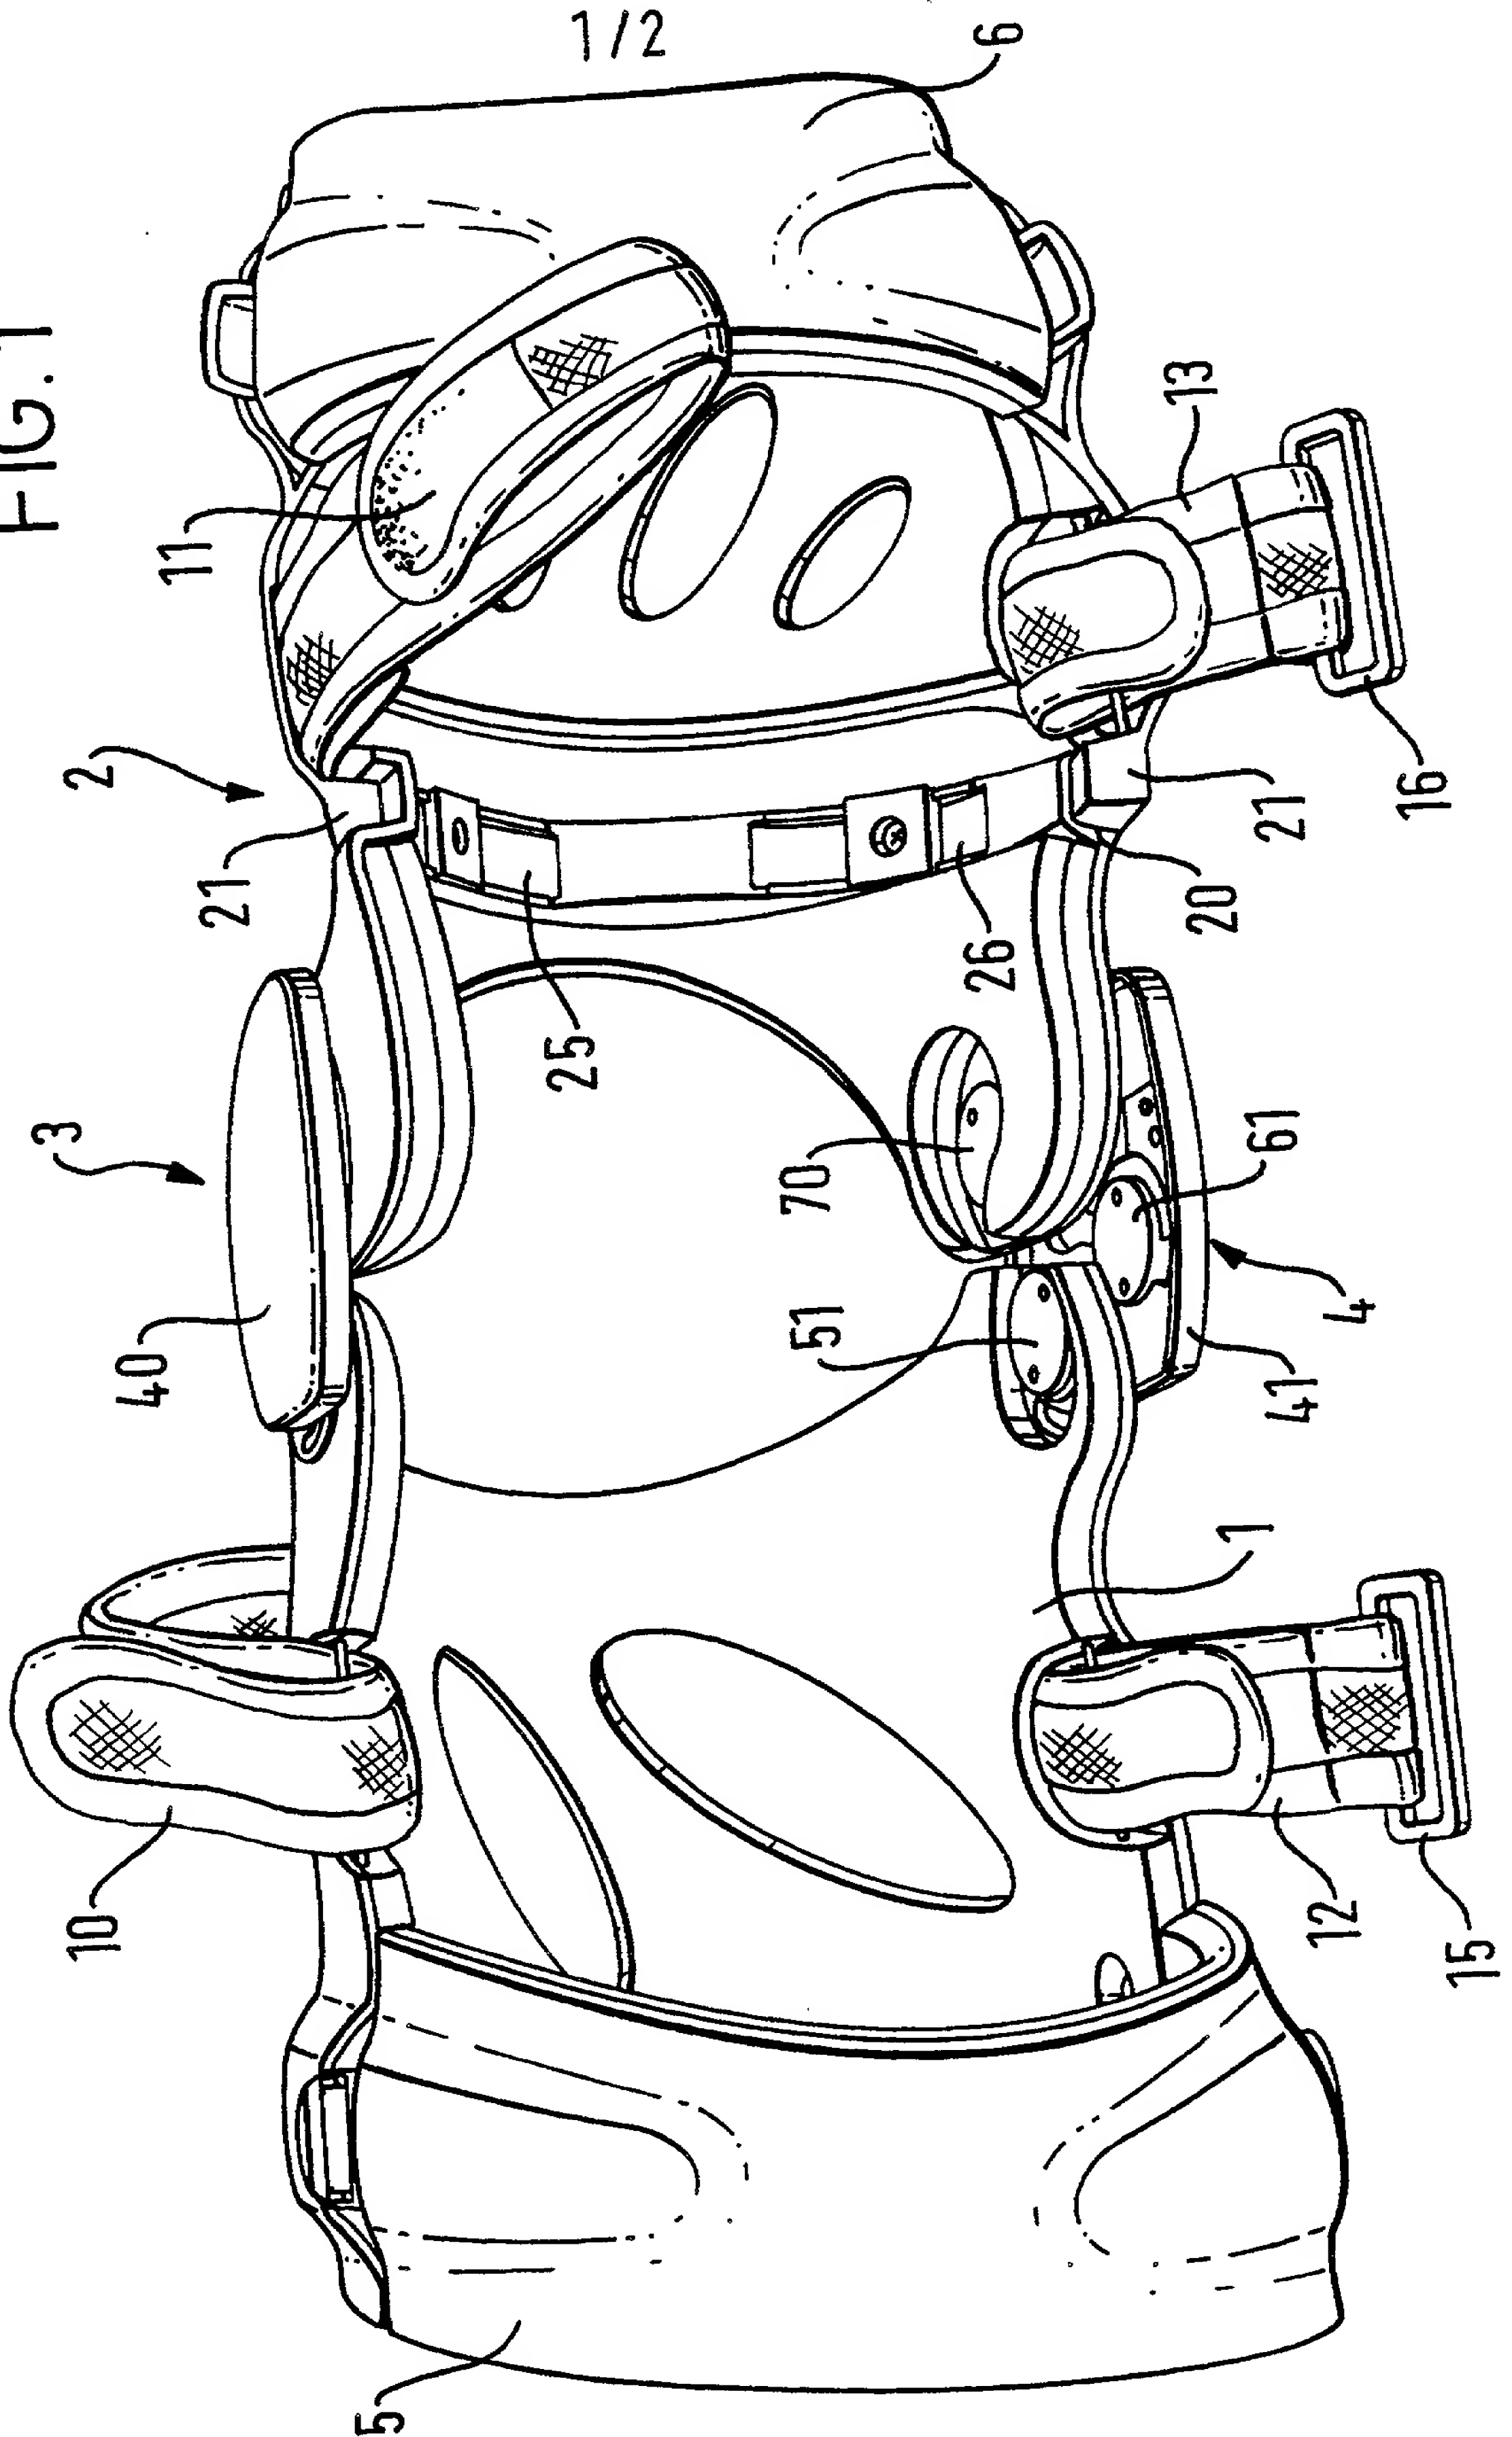
10

7. A hinge mechanism according to any one of the preceding Claims wherein the support members are made of rigid plastics or fibre reinforced resin type composition and include a metal reinforcement associates with the
15 pivotal connection to the hinge mechanism.

8. A limb protector or brace including a pair of hinge mechanisms according to any one of the preceding Claims.

0408250

FIG. 1





Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00, OMB 0651-0032

Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number	
	First Named Inventor	KELVIN DOYLE
	COMPLETE IF KNOWN	
	Application Number	PCT 16398/00113
	Filing Date	03/05/98
	Group Art Unit	
<input type="checkbox"/> Declaration Submitted with Initial Filing	OR	<input checked="" type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)
Examiner Name		

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

KELVIN DOYLE BRITISH CITIZEN.
4 ARTILLERY PLACE,
MEPHAM CRESCENT, HARROW, HA3 6QT ENGLAND

the specification of which

(Title of the invention)

☐ is attached hereto

HINGE MECHANISM.

OR

☒ was filed on (MM/DD/YYYY) 03/05/98 as United States Application Number or PCT International

Application Number PCT/97/98/00113 and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION**ADDITIONAL INVENTOR(S)**
Supplemental Sheet
Page ____ of ____**Name of Additional Joint Inventor, if any:**☒ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Inventor's
Signature

Date

Residence: City

State

Country

Citizenship

Post Office Address

Post Office Address

City

State

ZIP

Country

Name of Additional Joint Inventor, if any:☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Inventor's
Signature

Date

Residence: City

State

Country

Citizenship

Post Office Address

Post Office Address

City

State

ZIP

Country

Name of Additional Joint Inventor, if any:☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Inventor's
Signature

Date

Residence: City

State

Country

Citizenship

Post Office Address

Post Office Address

City

State

ZIP

Country

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.